

4

4



Electrical Specification


Part No	:	AT-MD-1400
TX Pass Band Freq	:	(1498-1522) MHz
RX Pass Band Freq	:	(1428-1452) MHz
Insertion Loss TX Passband	:	1.0dB Max
Insertion Loss RX Passband	:	1.0dB Max
Attenuation To 12GHz	:	30 dB
Attenuation To 30-1400MHz	:	50 dB
TX-RX Isolation	:	>80 dB
RF Connectors	:	SMA(F)
Nominal Impedance	:	50 Ω
Power Handling Capacity	:	50 W

3

3

2

2

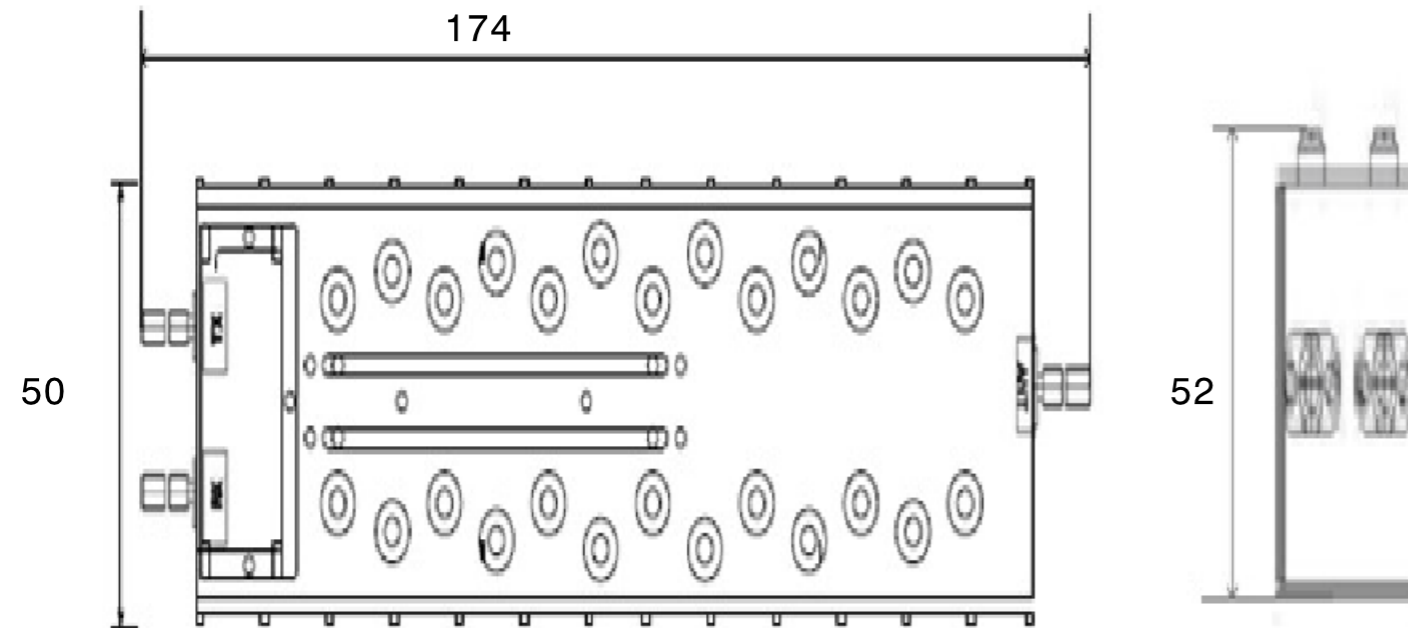

Mechanical Specification

Dimensions	:	174x52x50
Finish	:	Silver Plating & Silver

1

1

DESIGNED BY: Kiran Kumar	<h1>DUPLEXER</h1>		I	-
DATE: 15/12/2016			H	-
CHECKED BY: Mr. S. Metri			G	-
DATE: 16/12/2016	<h2>ANAND TECHNOLOGIES</h2>		F	-
SIZE: A3			E	-
SCALE: 1:1	WEIGHT (kg): XXX	DRAWING NUMBER: AT-MD-1400	D	-
		SHEET: 1/1	C	-
This drawing is our property; it can't be reproduced or communicated without our written agreement.			B	-
			A	-