




Electricl Specification

Part No	:	AT--ANT-CSCM-SMA-KC174 (ASL)	
Antenna Type	:	GPS	GSM
Frequency Range(MHz)	:	1575.425 ± 3	850,900,1800,1900
LNA Gain(±0.5dBi)	:		
Without cable	:	>27.5	NA
Patch Gain (dBi)	:	>3.5±0.5	2.5 ±0.5
Noise Figure(dB)	:	<1.2-1.3	NA
DC Operating Voltage	:	2.7-5.0 V	NA
Impedance (Ω)	:	50	
Polarization	:	RHCP	Omni
RF Cable	:	RG 174 3 mtrs length with kevlar	
RF Connector	:	GPS-RPSMA	GSM-SMA(M)

Mechanical Specification

Dimensions	:	68x60x107 mm
Mount Type	:	Top Surface Mount
Operating Temperature	:	-20 to +65(°C)
Enclosure	:	Abs,Pc
Environment	:	95% RH Humidity
Description	:	GSM/GPS COMBO Antenna

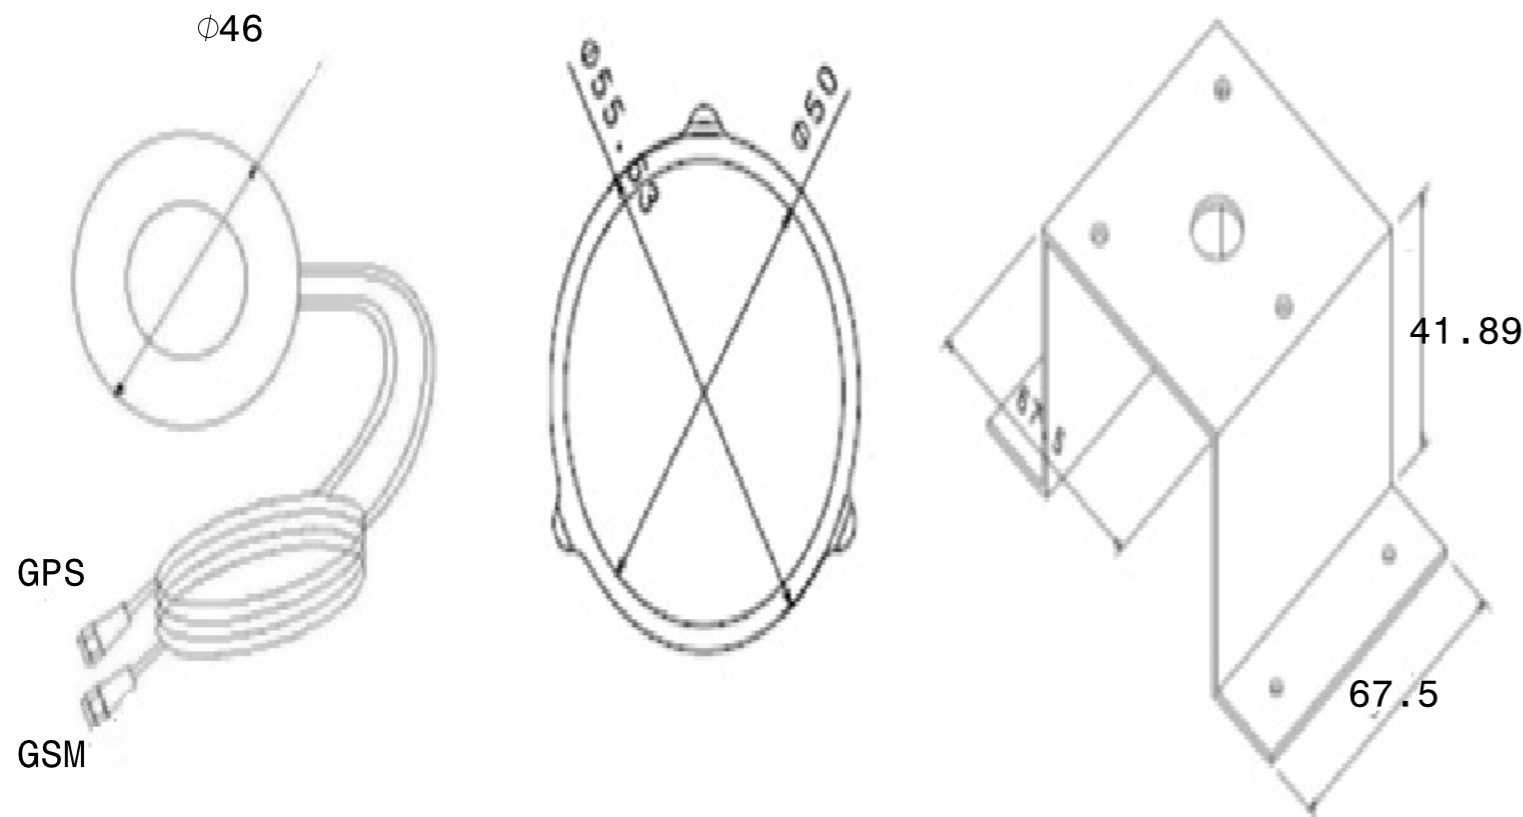

DESIGNED BY: Kiran Kumar	GSM/GPS COMBO ANTENNA	I	-
DATE: 03/10/2016		H	-
CHECKED BY: Mr. S. Metri	ANAND TECHNOLOGIES	G	-
DATE: 03/10/2016		F	-
SIZE A3	AT-ANT-CSCM-SMA-KC174-28-3.0 (ASL)	E	-
SCALE 1:1		D	-
WEIGHT (kg) XXX	DRAWING NUMBER AT-ANT-CSCM-SMA-KC174-28-3.0 (ASL)	C	-
		B	-
	SHEET 1/1	A	-

This drawing is our property; it can't be reproduced or communicated without our written agreement.